

## ProDVX GM-75

**Instruction** manual




www.prodvx.com

## ProDVX GM-75 Glass Mount

Thank you for choosing the ProDVX GM-75 Glass Mount. This is a step-by-step instruction manual to successfully install the ProDVX GM-75 Glass Mount for your 10" display. The ProDVX GM-75 Glass Mount contains the following parts:



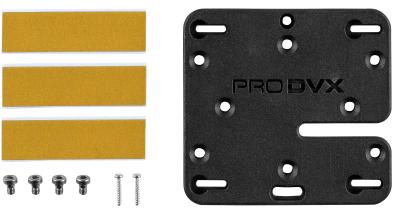

- 1 x Glass Mount Cover Sticker
- 1 x ProDVX GM-75 Mount frame
- 3 x adhesive strips
- 4 x short VESA screws
- 2 x safety screws

Please contact support@prodvx.com if you need additional support.



## Applying the Glass Mount Cover Sticker

- 1. Clean the surface, preferably with Pro-Screen Cleaner spray.
- 2. Affix the Glass Mount Cover Sticker to the glass where the tablet will be placed.
- 3. Use a solid straight item to even out the Glass Mount Cover Sticker.
- 4. Even out big bubbles with the straight item (little bubbles will disappear in time).
- 5. Gently pull down the paper from the front side.
- 6. Clean the Glass Mount Cover Sticker with Pro-Screen Cleaner spray and let it dry for three minutes.



## **Mounting your device**

- 7. Add the three adhesive strips **horizontally** to the **backside** of the ProDVX GM-75 Mount frame and remove the yellow paper from the three adhesive strips.
- 8. Firmly press the ProDVX GM-75 Mount frame onto the Glass Mount Cover Sticker and hold for ten seconds. Let the adhesive tape bond for 2-3 hours\*.
- 9. Screw the four VESA screws into your 10" display's VESA holes. Tighten the screws by hand as they should stick out a few mm for affixing into the keyholes.
- 10. Align the screws on the back of the tablet with the four large keyholes on the ProDVX GM-75 Mount frame and slide from left to right until you hear a click!
- 11. Insert the two included safety screws into the top of the mounting plate. This will lock the mounting screws into place.



\*At room temperature it takes at least 20 minutes before 50% of the total strength has been reached. After 24 hours, the strength should be around 90% and it will take approx. 72 hours before 100% strength is reached. We recommend to wait at least a couple of hours before mounting the display. (Best is to wait a day.)