

## **WE ARE PRODVX**

Thank you for your interest in our company. We are pleased to present to you our 2020 product catalogue with our newest products and features.

Since 2004, we have been making the difference for our clients with valuable solutions. We do this by leading the way in product development and through our diverse and innovative product portfolio.

We provide high quality, state-of-the-art Android and Intel SOC displays, touchscreens and related accessories for numerous markets and applications. Our products are globally renown for their reliability, affordability and ease-of-use.

We value direct and short lines of communication with our supply chain partners. This way, we are able to keep prices down but also deliver tailored service and support to end-users. Our customers know they can rely on us, our resellers and distributors.

Would you like to know more about us and our products? Please feel free to contact us. You can visit our website at www.prodvx.com or send an e-mail to sales@prodvx.com.

We are looking forward doing business with you.

Best regards, ProDVX

#### **HOME**

Home Automation Access Control Intercom Security

#### **HOSPITALITY**

Customer Feedback Room Signage Wayfinding Digital Signage POS

## LOGISTICS

Scan Terminal Workstation



#### **GOVERNMENT**

Queuing System Room Signage Wayfinding Digital Signage

#### **HEALTHCARE**

Queuing System Room Signage Wayfinding i-Kiosk



#### CORPORATE

Meeting Room Signage Access Control Digital Signage Wayfinding


#### **EDUCATION**

Room Signage Digital Signage Wayfinding Security

#### RETAIL

Customer Feedback Price Checker Digital Signage Security i-Kiosk POS

# **OUR PRODUCTS**

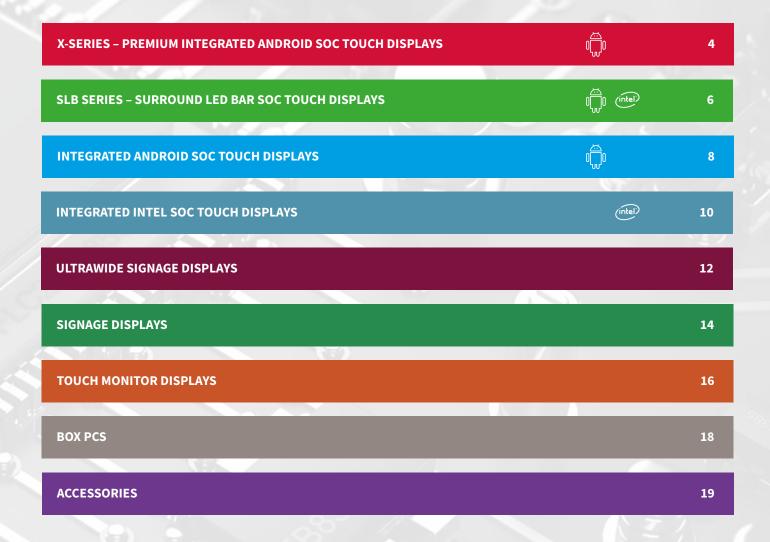



# Premium Integrated Android SOC Touch Displays

**X-Series** 

The brand new, state-of-the-art X-Series consists of four Premium Integrated Android SOC Touch Displays. All displays come with Android 8, Power over Ethernet (PoE) and 16 GB Internal Storage. The X-Series are available in 7, 10, 15 and 22 inch. These displays are professionally designed and manufactured All-in-One Touch Displays with Embedded ARM processor. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**



Android 8, Linux Ubuntu (optional)



High quality and durable PCAP touch



Available sizes: 7, 10, 15 and 22 inch



Integrated LED status lights (RGB)



Commercial grade continuous usage (24/7)



Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

#### **MARKETS**

The X-Series is ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- · Feedback Terminals
- · Price Checker

		APPC-7XPL	APPC-10X/P/L	APPC-15XP	APPC-22X/P
Panel	Size	7"	10.1"	15.6"	21.5"
	Туре	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	Resolution	1024 × 600	1280×800	1920 x 1080	1920 x 1080
	Aspect Ratio	17:10 wide	16:10 wide	16:9 wide	16:9 wide
	Backlight	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	Brightness	450 cd/m2	500 cd/m2	300 cd/m2	250 cd/m2
	Viewing Angle	H 170°/V 170°	H 160°/V 160°	H 170°/V 170°	H 178° / V 178°
	Contrast Ratio	800:1	800:1	800:1	
	Touch Type	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
System (SOC)	CPU	Cortex A53, Octa Core, RK3368H	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288
	GPU	GC6110	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)
	System Memory	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM
	Internal Storage	16GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash
	External Storage	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)
	os	Android 8	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu
	LED Light Bar	2 side led bar (RGB)	2 side led bar (RGB)	N/A	2 side led bar (optional)
	I/O Ports	Micro-USB / USB /RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / SPDIF/GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / SPDIF/ 3.5 mm audio-out / RJ45 / PO- GO-Connector / 12V DC-IN
	Network LAN RJ45	10/100 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN
	WiFi / Bluetooth	802.11 b/g/n/ac / BT4.2	802.11 a/b/g/n/ac / BT 4.2	802.11 a/b/g/n/ac / BT 4.2	802.11 a/b/g/n/ac / BT 4.2
	(PoE) Power over Ethernet	IEE 802.3 af/at	IEE 802.3 af / at (XP/L)	IEE 802.3 af/at	IEE 802.3 bt Type 3 (XP)
Physical	Housing	Plastic	Plastic	Plastic	Plastic
	Color	Black	Black	Black	Black
	Weight	500 g	650 g	1300 g	4200g
	Dimensions	188 x 120 x 24 mm	255 x 181 x 25 mm	388 x 242 x 28 mm	531 x 322 x 35 mm
	Mounting / VESA	VESA unique pattern	VESA 75	VESA 100	VESA 100
	Power Supply	12V / 2A (EU, UK, US)	12V / 2A (EU, UK, US)	12V / 2A (EU, UK, US)	12 V / 5 A
	Power Usage	4 ~ 11 Watt	10 ~ 20 Watt	10 ~ 20 Watt	30 ~ 45 Watt
Other	Working Temp	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C
	Standard Warranty	2 years	2 years	2 years	2 years
	Certifications	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & ROHS	FCC, CE, & RoHS
	Optional Vesa Glass Mount	GM-75	GM-75	-	-
	Optional Wall Mount	WM-25	WM-25	WM-25	WM-25

# **Surround LED Bar SOC Touch Displays**

**Android & Intel Panel PCs** 

The prize-winning SLB Series consists of three 10 inch SOC Touch Displays with Surround LED Bar. Having won a COMPUTEX Design & Innovation Award and Stevie® Innovation of the Year Award for its outstanding design and cutting-edge technology, the SLB Series is the ultimate solution for Room Booking, Room Signage and Customer Feedback Systems. ProDVX offers an one-of-a-kind unique Integrated Intel SOC Touch Display with Surround LED Bar.







#### **FEATURES**



Android 6, 8, Linux Ubuntu (optional)



(intel) Windows 10, Linux (optional)



High quality and durable PCAP touch



Available size: 10 inch



Surround LED Bar (RGB)



Commercial grade continuous usage (24/7)



Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

#### **MARKETS**

The SLB-Series is ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets

#### **APPLICATIONS**

- Room Booking
- Queuing
- Feedback Terminals
- Access Control
- Price Checker

- i-Kiosk
- Interactive Digital Signage
- · POS/POP
- Security
- Wayfinding

#### **AWARDS**





		APPC-10SLB	APPC-10SLBW		
Panel	Size	10.1"	10.1"		
	Туре	TFT LCD IPS	TFT LCD IPS		
	Resolution	1280 x 800	1280 x 800		
	Aspect Ratio	16:10 wide	16:10 wide		
	Backlight	LED Side-light type	LED Side-light type		
	Brightness	500 cd/m2	500 cd/m2		
	Viewing Angle	H 160° / V 160°	H 160°/V 160°		
	Contrast Ratio	800:1	800:1		
	Touch Type	5 point touch projected capacitive	5 point touch projected capacitive		
ystem (SOC)	СРИ	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288		
	GPU	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)		
	System Memory	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM		
	Internal Storage	16 GB eMMC Flash	16 GB eMMC Flash		
	External Storage	SD-Card Slot (hidden)	SD-Card Slot (hidden)		
	os	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu		
	LED Light Bar	RED / GREEN / BLUE (Full RGB)	RED / GREEN / BLUE (Full RGB)		
	I/O Ports	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 POGO-Connector / 12V DC-IN	/ Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN		
	Network LAN RJ45	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN		
	WiFi / Bluetooth	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2		
	(PoE) Power over Ethernet	IEE 802.3 af / at	IEE 802.3 af / at		
nysical	Housing	Plastic	Plastic		
	Color	Black	White		
	Weight	650 g	650 g		
	Dimensions	255 x 181 x 25 mm	255 x 181 x 25 mm		
	Mounting / VESA	VESA 75	VESA 75		
	Power Supply	12 V / 2 A	12 V / 2 A		
	Power Usage	10 ~ 20 Watt	10 ~ 20 Watt		
ther	Working Temp	0 ~ 40 degrees C	0 ~ 40 degrees C		
	Standard Warranty	2 years	2 years		
	Certifications	FCC, CE, & RoHS	FCC, CE, & RoHS		
	Optional Vesa Glass Mount	GM-75	GM-75		
	Optional Wall Mount	WM-25	WM-25		

Size
Resolution         1280 x 800           Aspect Ratio         16:10 wide           Backlight         LED Side-light type           Brightness         500 cd/m2           Viewing Angle         H 160° / V 160°           Contrast Ratio         800:1           Touch Type         5 point touch projected capacitive           tem (SOC)         CPU   Intel Atom x5-Z8350 Quad Core
Aspect Ratio  Backlight  LED Side-light type  Brightness  500 cd/m2  Viewing Angle  Contrast Ratio  800 : 1  Touch Type  5 point touch projected capacitive  tem (SOC)  CPU  Intel Atom x5-Z8350 Quad Core
Backlight  Brightness  500 cd/m2  Viewing Angle  Contrast Ratio  Touch Type  5 point touch projected capacitive  tem (SOC)  CPU  Intel Atom x5-Z8350 Quad Core
Brightness 500 cd/m2  Viewing Angle H 160° / V 160°  Contrast Ratio 800 : 1  Touch Type 5 point touch projected capacitive  tem (SOC) CPU Intel Atom x5-Z8350 Quad Core
Viewing Angle H 160° / V 160°  Contrast Ratio 800 : 1  Touch Type 5 point touch projected capacitive  tem (SOC) CPU Intel Atom x5-Z8350 Quad Core
Contrast Ratio 800:1  Touch Type 5 point touch projected capacitive  tem (SOC) CPU Intel Atom x5-Z8350 Quad Core
Touch Type 5 point touch projected capacitive  tem (SOC) CPU Intel Atom x5-Z8350 Quad Core
tem (SOC) CPU Intel Atom x5-Z8350 Quad Core
GPU Intel HD Graphics
<b>Cooling</b> Fanless
System Memory 4 GB DDR3 1600
Internal Storage 64 GB eMMC
Storage Socket 2 SD Card Slot (internal)
OS Windows 8 / 10 / Linux
I/O Ports USB 3.0 / USB 2.0 / 3.5 mm audio out / RJ45 / POGO-Connector / 12V DC-IN
<b>Network LAN RJ45</b> 10/100/1000 Mbps LAN
WiFi / Bluetooth 802.11 a/c wireless module
Power over Ethernet (PoE) IEE 802.3 af / at
rsical Housing Plastic
Color
Speakers 2 x 2W
Audio Jack Output 3.5 mm
Weight 640 g
<b>Dimensions</b> 255 x 181 25 mm
Mounting / VESA VESA 75
Power Supply 12 V / 3.3 A
Power Usage 11 ~ 26 Watt
er Working Temp -10 ~ 50 degrees C
Standard Warranty 2 years
<b>Certifications</b> FCC, CE, & RoHS

# **Integrated Android SOC Touch Displays**

**Android Panel PC (APPC)** 

The Integrated Android SOC Touch Displays by ProDVX are professionally designed and manufactured All-in-One Touch Displays with Embedded ARM processor for commercial continuous (24/7) use. With over 8 years of experience manufacturing Android powered All-in-One devices, ProDVX offers a wide variety of sizes, from 7 inch up to 32 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**



Android 6, 8, Linux Ubuntu (optional)



High quality and durable PCAP touch



Available sizes: 7, 10, 12, 13, 15, 17, 22, 24, 27 and 32 inch



Integrated LED status lights



Commercial grade continuous usage (24/7)



Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

#### **MARKETS**

ProDVX's cost-effective Integrated Android Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- · Feedback Terminals
- Price Checker

		APPC-10DSK/P/L	APPC-12DSKP	APPC-13DSKP	APPC-15DSKP	APPC-17EL	APPC-22DSK	APPC-24DSK	APPC-27DSK	APPC-32EL	APPC-32DSK
Panel	Size	10.1"	11.6"	13.3"	15.6"	17.3"	21.5"	23.6"	27"	32"	31.5"
	Туре	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	Resolution	1280 x 800	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
	Aspect Ratio	16:10 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide
	Backlight	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	Brightness	500 cd/m2	350 cd/m2	300 cd/m2	300 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	300 cd/m2	250 cd/m2	400 cd/m2
	Viewing Angle	H 160° / V 160°	H 160°/V 160°	H 170° / V 170°	H 170°/V 170°	H 170°/V 170°	H 178° / V 178°	H 178° / V 178°	H 170°/V 160°	H 178° / V 178°	H 178° / V 178°
	Contrast Ratio	600:1	800:1	800 : 1	800:1	800:1	3000:1	1000:1	3000:1	3000:1	1200 : 1
	Touch Type	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
System (SOC)	СРИ	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288			
	GPU	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)			
	System Memory	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM			
	Internal Storage	8 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	8 GB eMMC Flash	8 GB eMMC Flash	8 GB eMMC Flash	16 GB eMMC Flash	8 GB eMMC Flash
	External Storage	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot	SD-Card Slot (hidden)
	os	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 8 / Linux Ubuntu	Android 6	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6	Android 6 / 8 / Linux Ubuntu
	LED Light Bar	DSKPL (RED / GREEN)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	I/O Ports	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN
	Network LAN RJ45	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100 Mbps LAN	10/100/1000 Mbps LAN
	WiFi / Bluetooth	802.11 a/b/g/n / BT 4.2	802.11 b/g/n / BT 4.0	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 b/g/n / BT 4.0	802.11 a/b/g/n / BT 4.2			
	(PoE) Power over Ethernet	IEE 802.3 af/at (DSKP/L)	IEE 802.3 af/at	IEE 802.3 af/at	IEE 802.3 af/at	N/A	N/A	N/A	N/A	N/A	N/A
Physical	Housing	Plastic	Plastic	Plastic	Plastic	Plastic	Metal	Metal	Metal	Plastic	Metal
	Color	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black
	Weight	610 g	900 g	1040 g	1300 g	1610 g	6365 g	7210 g	8300 g	8500 g	10540 g
	Dimensions	252 x 178 x 24 mm	296 x 192 x 26 mm	338 x 215 x 26 mm	388 x 242 x 28 mm	418 x 263 x 27 mm	536 x 329 x 43 mm	576 x 345 x 43 mm	650 x 390 x 43 mm	751 x 450 x 42 mm	769 x 471 x 49 mm
	Mounting / VESA	VESA 75	VESA 75	VESA 75	VESA 100	VESA 100	VESA 100	VESA 100	VESA 100	VESA 100	VESA 200
	Power Supply	12 V / 2 A	12 V / 3 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	AC 110 V - 240 V			
	Power Usage	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt			
Other	Working Temp	-10 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C	-10 ~ 50 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C
	Standard Warranty	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years
	Certifications	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS			
	Optional Vesa Glass Mount	GM-75	GM-75	GM-75	-	-	-	-	-	-	-
	Optional Wall Mount	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	-

# **Integrated Intel SOC Touch Displays**

Intel Panel PC (IPPC)

The Integrated Intel SOC Touch Displays by ProDVX are professionally designed and manufactured All-in-One Touch Displays with Integrated Intel x86 processor for commercial continuous (24/7) use. With over 14 years of experience manufacturing Intel x86 powered All-in-One devices, ProDVX offers a wide variety of sizes, from 7 inch up to 32 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**



(intel) Windows 10, Linux Ubuntu (optional)



High quality and durable PCAP touch



Available sizes: 7, 10, 15, 22, 24, 27 and 32 inch



Commercial grade continuous usage (24/7)



Several connectivity options such as LAN, Wi-Fi, Bluetooth and POGO ports for accessories

#### **MARKETS**

ProDVX's cost-effective Integrated Intel x86 Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- Office
- · Home Automation

Profession   Pro			IPPC-07	IPPC-10 HD	IPPC-15	IPPC-22	IPPC-24	IPPC-27	IPPC-32
Modeline (1968)	Panel	Size	7"	10.1"	15.6"	21.5"	23.6"	27"	31.5"
Part		Туре	TFT LCD	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
		Resolution	1024 x 600	1280 x 800	1920 x 1080				
		Aspect Ratio	17:10 wide	16:10 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide
Part		Backlight	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
Part		Brightness	240 cd/m²	500 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	250 cd/m²	250 cd/m²	300 cd/m <sup>2</sup>	400 cd/m²
Symbol		Viewing Angle	H 140°/V 130°	H 160°/V 160°	H 170° / V 170°	H 178° / V 178°	H 178° / V 178°	H 170°/V 160°	H 178°/V 178°
Part		Contrast Ratio	600:1	600:1	800:1	3000:1	1000:1	3000:1	1200:1
Part		Touch Type	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive				
	System (SOC)	СРИ	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core
		GPU	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics
		Cooling	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
		System Memory	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600
		Internal Storage	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD
		Storage Socket 2	SD Card Slot (internal)	SD Card Slot (internal)	SD-Card Slot (door)	SD Card Slot (internal)			
		os	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux
Mile		I/O Ports	audio-out / RJ45 / POGO-Connector		HDMI / Combo Jack / SPDIF / RJ45 /				
Policy   P		Network LAN RJ45	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN
Physical Plastic Front / Metal Backside         Plastic Front / Metal Backside         Plastic Pront / Metal Backside         Plastic Pront / Metal Backside         Metal         <		WiFi / Bluetooth	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module
Color         Black         2         2         4         2		(PoE) Power over Ethernet	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Speakers         2 x 2 W         <	Physical	Housing	Plastic Front / Metal Backside	Plastic Front / Metal Backside	Plastic	Metal	Metal	Metal	Metal
Audio Jack Output 3.5mm         N/A         YES		Color	Black	Black	Black	Black	Black	Black	Black
Weight         500 g         610 g         1400 g         7000 g         7500 g         8300 g         10450 g           Dimensions         188 x 120 x 25 mm         252 x 178 x 24 mm         388 x 242 x 28 mm         536 x 329 x 43 mm         576 x 345 x 43 mm         650 x 390 x 43 mm         769 x 471 x 49 mm           Mounting/VESA         VESA unique pattern         VESA 75         VESA 100         VESA 100         VESA 100         VESA 100         VESA 200           Power Supply         12 V/ 2 A         12 V/ 3 A         12 V/ 5 A         12 V/ 5 A         12 V/ 5 A         12 V/ 5 A         A C1 10 V - 240 V           Power Usage         4 ~ 11 Watt         11 ~ 26 Watt         0 ~ 40 degrees C         2 years		Speakers	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W
Dimensions   188 x 120 x 25 mm   252 x 178 x 24 mm   388 x 242 x 28 mm   536 x 329 x 43 mm   576 x 345 x 43 mm   650 x 390 x 43 mm   769 x 471 x 49 mm		Audio Jack Output 3.5mm	N/A	YES	YES	YES	YES	YES	YES
Mounting / VESA         VESA unique pattern         VESA 75         VESA 100         VESA 100         VESA 100         VESA 100         VESA 100         VESA 200           Power Supply         12 V / 2 A         12 V / 3.3 A         12 V / 5 A         AC 110 V - 240 V           Power Usage         4 ~ 11 Watt         11 ~ 26 Watt         0 ~ 40 degrees C         2 years         2 y		Weight	500 g	610 g	1400 g	7000 g	7500 g	8300 g	10450 g
Power Supply         12 V / 2 A         12 V / 5 A         AC 110 V - 240 V           Power Usage         4 ~ 11 Watt         11 ~ 26 Watt         10 ~ 40 degrees C         0 ~ 40 degrees C         2 years         2 years         2 years         2 years         2 years         2 years		Dimensions	188 x 120 x 25 mm	252 x 178 x 24 mm	388 x 242 x 28 mm	536 x 329 x 43 mm	576 x 345 x 43 mm	650 x 390 x 43 mm	769 x 471 x 49 mm
Power Usage         4 ~ 11 Watt         11 ~ 26 Watt <th></th> <th>Mounting / VESA</th> <th>VESA unique pattern</th> <th>VESA 75</th> <th>VESA 100</th> <th>VESA 100</th> <th>VESA 100</th> <th>VESA 100</th> <th>VESA 200</th>		Mounting / VESA	VESA unique pattern	VESA 75	VESA 100	VESA 100	VESA 100	VESA 100	VESA 200
Other         Working Temp         -10 ~ 50 degrees C         -10 ~ 50 degrees C         0 ~ 40 degrees C         2 years		Power Supply	12 V / 2 A	12 V / 3.3 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	AC 110 V - 240 V
Standard Warranty 2 years		Power Usage	4 ~ 11 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt
	Other	Working Temp	-10 ~ 50 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C
Certifications FCC, CE & RoHS		Standard Warranty	2 years	2 years	2 years	2 years	2 years	2 years	2 years
		Certifications	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS

# **UltraWide Signage Displays**

**Integrated Android PC** 

The UltraWide Signage Displays by ProDVX are custom designed and manufactured All-in-One Displays with Embedded ARM processor (SOC) for commercial continuous (24/7) use.

These UltraWide displays offer a unique slim form factor and come in three sizes: 24, 28 and 37 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**

Available sizes: 24, 28 and 37 inch

Commercial grade continuous usage (24/7)

Several connectivity options such as LAN, Wi-Fi and Bluetooth

Long-life-availability of products and parts (3 to 5 years)

#### **MARKETS**

ProDVX's unique UltraWide Signage Displays are ideal for applications in Retail, Corporate, Hospitality, Healthcare, Government, Education and many more markets.

- Menu Boards
- Queuing
- Digital Signage
- Wayfinding

Ase As	
Resolution         1920 x 360         1920 x 360         1920 x 360           Aspect Ratio         163 wide         163 wide         329 wide           Backlight         LED Side light type         LED Side light type         LED Side light type           Brightness         300 cd/m²         700 cd/m²         700 cd/m²         700 cd/m²           Vewing Angle         H 178° / V 178°         H 178° / V 178°         4178° / V 178°         4000 :1           Veyter (SVC)         PU         Cortex A17, 166 Hz, 4-Core, RK3288         Cortex A17, 166 Hz, 4-Core, RK3288<	
Aspect Ratio 16.3 wide 16.3 wide 16.3 wide 16.3 wide 16.5 wide 16.	
Backlight         LED Side light type         LED Side light type         LED Side light type           Problem Signature         300 cd/m²         700 cd/m²         700 cd/m²         700 cd/m²           Verking Angle         H178° /V 178°           Verking Son         Christs Ratio         1200:1         200:1         4000:1           Verking Son         PU         Contrast Ratio         Contrast Ratio         Contrast Ratio         Contrast Ratio         Contrast Ratio         And 1764 / 3D Graphic Engine (4K)         MALI T764 / 3D Graphic Engine (4K)         AND TYPE / 3D	
Rightness	
Viewing Angle         H 178° / V 178°         H 178° / V 178°         H 178° / V 178°           Contrast Ratio         1 200 : 1         200 : 1         4000 : 1           Vestern (SOC)         CPU         Cortex A17, 1.6GHz, 4-Core, RK3288           GPU         MALI T764 / 3D Graphic Engine (4K)         MALI T764 / 3D Graphic Engine (4K)         MALI T764 / 3D Graphic Engine (4K)           System Memory         2 GB DDR3 SDRAM         2 GB DDR3 SDRAM         2 GB DDR3 SDRAM         2 GB DDR3 SDRAM         3 GB BMMC Flash         16 GB eMMC Flash         16 GB eMMC Flash         16 GB eMMC Flash         16 GB eMMC Flash         5D-Card Slot (hidden)         SD-Card Slot (hidden)         SD-Card Slot (hidden)         SD-Card Slot (hidden)         Android 6         Android 6 <th< th=""><th></th></th<>	
Contrast Ratio1200:11200:14000:1Lystern (SOC) (System (SOC))CPUContex A17,16GHz, 4-Core, RK3288Contex A17,16GHz, 4-Core, RK3288Contex A17,16GHz, 4-Core, RK3288Contex A17,16GHz, 4-Core, RK3288GPUMALIT764/3D Graphic Engine (4K)MALIT764/3D Graphic Engine (4K)MALIT764/3D Graphic Engine (4K)System Memory2 GB DDR3 SDRAM2 GB DDR3 SDRAM2 GB DDR3 SDRAMInternal Storage16 GB eMMC Flash16 GB eMMC Flash16 GB eMMC FlashExternal StorageSD-Card Slot (hidden)SD-Card Slot (hidden)SD-Card Slot (hidden)OSAndroid 6Android 6Android 6I/O PortsMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
ystem (SOC Park No. 17.16 GHz, 4-Core, RK3288 Cortex A17.16 GHz, 4-Core, RK3288 Purp Park Park Park Park Park Park Park Park	
GPUMALI T764/3D Graphic Engine (4K)MALI T764/3D Graphic Engine (4K)System Memory2 GB DDR3 SDRAM2 GB DDR3 SDRAMInternal Storage16 GB eMMC Flash16 GB eMMC FlashExternal StorageSD-Card Slot (hidden)SD-Card Slot (hidden)OSAndroid 6Android 6Android 6I/O PortsMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
System Memory2 GB DDR3 SDRAM2 GB DDR3 SDRAMInternal Storage16 GB eMMC Flash16 GB eMMC Flash16 GB eMMC FlashExternal StorageSD-Card Slot (hidden)SD-Card Slot (hidden)SD-Card Slot (hidden)OSAndroid 6Android 6Android 6I/O PortsMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
Internal Storage16 GB eMMC Flash16 GB eMMC Flash16 GB eMMC FlashExternal StorageSD-Card Slot (hidden)SD-Card Slot (hidden)SD-Card Slot (hidden)OSAndroid 6Android 6Android 6I/O PortsMicro-USB/USB/3.5 mm audio-out/RJ45/HDMIMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI outMicro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
External Storage SD-Card Slot (hidden) SD-Card Slot (hidden) SD-Card Slot (hidden) SD-Card Slot (hidden)  OS Android 6 Android 6 Android 6  Micro-USB/USB/3.5 mm audio-out/RJ45/HDMI out Micro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
OS Android 6 Android 6 Android 6  I/O Ports Micro-USB/USB/3.5 mm audio-out/RJ45/HDMI Micro-USB/USB/3.5 mm audio-out/RJ45/HDMI out	
I/O Ports Micro-USB / USB / 3.5 mm audio-out / RJ45 / HDMI out Micro-USB / USB / 3.5 mm audio-out / RJ45 / HDMI out	
Network LAN RJ45         10/100 Mbps LAN         10/100 Mbps LAN	
<b>WiFi / Bluetooth</b> 802.11 b/g/n / BT 4.0 802.11 b/g/n / BT 4.0 802.11 b/g/n / BT 4.0	
ideo/Audio Video Support MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV	
Audio Support MP2, WMA, WAV, AAC, OGG, ASF MP2, WMA, WAV, AAC, OGG, ASF MP2, WMA, WAV, AAC, OGG, ASF	
Speakers N/A N/A N/A	
Physical Housing Metal Metal Metal	
Color Black Black Black	
<b>Weight</b> 2750 g 4550 g 9500 g	
<b>Dimensions</b> 616 x 140 x 29 mm 736 x 168 x 30 mm 902 x 285 x 39 mm	
Mounting / VESA unique pattern VESA unique pattern VESA unique pattern	
Power Supply         12 V / 3 A         12 V / 4 A         AC 100 V - 240 V	
Power Usage         10~18 Watt         11~19 Watt         12~26 Watt	
ther Working Temp -10 ~ 50 degrees C -10 ~ 50 degrees C -10 ~ 50 degrees C	
Standard Warranty   2 years   2 years     2 years	
Certifications FCC, CE & RoHS FCC, CE, CCC & RoHS FCC, CE & RoHS	

# **Signage Displays**

HDMI / Media Player

The Signage Displays by ProDVX are professionally designed displays and manufactured with HDMI input and Embedded FHD Media Player for commercial continuous (24/7) use. With over 10 years of experience manufacturing Signage Displays, ProDVX offers a wide variety of sizes, from 10 inch up to 22 inches. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**

Available sizes: 10, 14, 15, 18 and 22 inch

Commercial grade continuous usage (24/7)

▶ HDMI-in and Integrated Full HD Media Player

© Long-life-availability of products and parts (3 to 5 years)

#### **MARKETS**

ProDVX's cost-effective Signage Displays are ideal for applications in Retail, Corporate, Hospitality, Healthcare, Government, Education and many more markets.

- Digital Signage
- Customer Display
- Wayfinding
- Queuing
- Office

		SD-10	SD-14	SD-15	SD-18	SD-22
Panel	Size	10.1"	14"	15.6"	18.5"	21.5"
	Туре	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	Resolution	1280 x 800	1920 x 1080	1920 x 1080	1366 x 768	1920 x 1080
	Aspect Ratio	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide
	Backlight	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	Brightness	<b>250</b> cd/m2	300 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²
	Viewing Angle	H 160° / V 160°	H 160°/V 160°	H 160°/V160°	$\rm H~170^{\circ}/V~170^{\circ}$	H 160°/V 160°
	Contrast Ratio	450:1	700:1	800:1	800:1	600:1
System	Internal Media Player	YES	YES	YES	YES	YES
	Video Input	HDMI	HDMI	HDMI	HDMI	НДМІ
	Card Slot	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS
	USB Host	1 x	1x	1 x	1 x	1 x
	Auto Video Play & Loop	YES	YES	YES	YES	YES
Video / Audio	Video Support	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.
	Video Resolution	1280 x 800	1920 x 1080	1920×1080	1920×1080	1920 x 1080
	Audio Support	MP3, AAC	MP3, AAC	MP3, AAC	MP3, AAC	MP3, AAC
	Photo Support	JPEG, BMP	JPEG, BMP	JPEG, BMP	JPEG, BMP	JPEG, BMP
	Speakers	2 x 1 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 3 W
	Audio Jack Output 3.5mm	YES	YES	YES	YES	YES
Physical	Housing	Plastic	Plastic	Plastic	Plastic	Plastic
	Color	Black	Black	Black	Black	Black
	Weight	850 g	1000 g	1700 g	3000 g	3600 g
	Dimensions	247 x 170 x 21 mm	343 x 220 x 25 mm	388 x 245 x 27 mm	468 x 288 x 38 mm	538 x 331 x 37 mm
	Mounting / VESA	VESA 75 (half)	VESA 100	VESA 100	VESA 100	VESA 100
	Power Supply	5V/2A	12 V / 2 A	12 V / 2 A	12 V / 2 A	12 V / 3 A
	Power Usage	9 Watt	11 Watt	12 Watt	12 Watt	14 Watt
Other	Remote control	YES	YES	YES	YES	YES
	Working Temp	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C
	Standard Warranty	2 years	2 years	2 years	2 years	2 years
	Certifications	FCC, CE & RoHS	FCC, CE, CCC & RoHS	FCC, CE, CCC & RoHS	FCC, CE, CCC & RoHS	FCC, CE & RoHS

15

## **Touch Monitor Displays**

**Projected Capacitive Multi-Touch Monitors** 

The Touch Monitor Displays by ProDVX are specially designed and manufactured touchscreens for professional and continuous (24/7) use. With many years of experience manufacturing touchscreen solutions ProDVX offers a growing range of sizes. The current line-up consists of 7, 10, 15 and 22-inch displays. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**



High quality and durable PCAP touch



Available sizes: 7, 10, 15 and 22 inch



Commercial grade continuous usage (24/7)



Several connectivity options such as LAN, Wi-Fi, Bluetooth and POGO ports for accessories



Long-life-availability of products and parts (3 to 5 years)

#### **MARKETS**

ProDVX's cost-effective Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Security
- Access Control
- Feedback Terminals
- Price Checker

		TMP-07	TMP-10	TMP-10X *	TMP-15	TMP-22X *
Panel	Size	7"	10.1"	10.1"	15.6"	21.5"
	Туре	TFT LCD	TFT LCD	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	Resolution	1024 x 600	1024 x 600	1280 x 800	1920 x 1080	1920 x 1080
	Aspect Ratio	17:10 wide	17:10 wide	16:10 wide	16:9 wide	16:9 wide
	Backlight	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	Brightness	240 cd/m2	450 cd/m2	500 cd/m2	300 cd/m2	250 cd/m2
	Viewing Angle	H 140°/V 130°	H 140°/V 130°	H 160°/V 160°	H 170°/V 170°	H 178°/V 178°
	Contrast Ratio	600:1	600:1	800:1	800:1	3000:1
	Touch Type	5 point touch projected capacitive	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
System	Monitor	YES	YES	YES	YES	YES
	Internal Media Player	N/A	N/A	N/A	N/A	N/A
	Video Input	HDMI / VGA	USB 2.0 DisplayLink	HDMI	НДМІ	HDMI
	USB (Host)	1 x	1 x	1 x	1 x	1x
Video / Audio	Video Resolution	1024 x 600	1024 x 600	1280 x 800	1920×1080	1920 x 1080
	Speakers	N/A	N/A	2 x 2W	2 x 2W	2 x 3 W
	Audio Jack Output 3.5mm	N/A	N/A	YES	YES	YES
Physical	Housing	Plastic / Metal	Plastic / Metal	Plastic	Plastic	Metal
	Color	Black	Black	Black	Black	Black
	Weight	450 g	550 g	650 g	1200 g	6365 g
	Dimensions	188 x 120 x 24 mm	260 x 163 x 24 mm	255 x 181 x 25 mm	388 x 242 x 28 mm	536 x 329 x 43 mm
	Mounting / VESA	VESA unique pattern	VESA 75	VESA 75	VESA 100	VESA 100
	Power Supply	12 V / 2 A	12 V / 2 A	12V / 2A (EU, UK, US)	12 V / 2 A	12 V / 5 A
	Power Usage	6 Watt	9 Watt	10 ~ 20 Watt	10 Watt	10 ~ 20 Watt
Other	Working Temp	0 ∼ 50 degrees C	0 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 50 degrees C	-10 ~ 50 degrees C
	Standard Warranty	2 years	2 years	2 years	2 years	2 years
	Certifications	FCC, CE, & RoHS	FCC, CE,CCC & RoHS	FCC, CE, & RoHS	FCC, CE,CCC & RoHS	FCC, CE, & RoHS

## **Box PCs**

#### **Industrial Grade Box PCs**

The Box PC solutions by ProDVX are specially designed and manufactured Industrial grade PC's for professional and continuous (24/7) use. With many years of experience manufacturing compact, fanless and robust PC systems ProDVX offers a reliable and growing product range with various chipsets and processors. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



#### **FEATURES**



Android 5, 9



(intel) Linux (optional)



Commercial grade continuous usage (24/7)



Several connectivity options such as Power over Ethernet, Wi-Fi and RS232



Long-life-availability of products and parts (3 to 5 years)

#### **MARKETS**

ProDVX's cost-effective Box PCs are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

- i-Kiosk
- Interactive Digital Signage
- Industrial Automation
- POS/POP
- Security
- Access Control
- Office and Home Automation

#### **ACCESSORIES**





GM-75 Glass Mount



COV-10 DSK Coverplate



BAR-10 Barcode Scanner



NFC NFC Module



DS-75 Desk Stand



WM-35 Wall Mount



DS-10 Desk Stand



DS-100 Desk Stand



FS-10 Floor Stand



## **ProDVX Europe**

Europalaan 12F 5232 BC Den Bosch The Netherlands +31 (0)73 737 0345 info@prodvx.com www.prodvx.com

### **ProDVX Europe Warehouse**

Gerolsteinbaan 7-9 5121 DN Rijen The Netherlands

For technical enquiries: support@prodvx.com

#### **ProDVX Asia**

4F., No 57, Section 2, Yonghe Road, Yonghe District New Taipei City 23444 Taiwan +886 277298548 info@prodvx.com.tw www.prodvx.com.tw