

APPC-10XPL

(R23-7262)

Android Panel PC



Product Overview

The APPC-10XPL (R23-7262) is a 10.1-inch Android Panel PC, featuring Android 13 and a new quad-core Cortex-A55 CPU and Mali-G52 GPU (RK3568). It comes with a 2-sided RGB LED bar for efficient signalling. The APPC-10XPL (R23-7262) ensures superior performance and next-level user experience. Enjoy hassle-free installation with the VESA mounting frame, and Power over Ethernet+capability for efficient power provisioning. In addition, the non-glare touch panel, which supports 10-point PCAP touch functionality and high brightness, ensures an optimal user experience. The APPC-10XPL (R23-7262) is a highly versatile device, capable of handling any solution with ease. Its variety of I/O ports and pogo pin ports allow you to add any peripheral to further enhance your solution.



Powered by Android 13, the APPC-10XPL offers access to the full range of advantages that the Android platform provides, including robust security features and great flexibility.



Revolutionise your user experience with the APPC-10XPL, fuelled by a new powerful quad-core Cortex-A55 CPU and Mali-G52 GPU, this Android Panel PC delivers high performance and advanced graphical capabilities.



Enjoy a simplified installation process. The APPC-10XPL is easy to install with its VESA mounting frame and Power over Ethernet+. You will be up and running in no-time.



From room signage to point-of-sale solutions, easily employ efficient signalling via the 2-sided RGB LED bars.




The APPC-10XPL comes with a new non-glare coating, contributing to a more comfortable viewing experience by reducing reflections, enhancing visibility and diminishing eye strain.

APPC-10XPL (R23-7262)

Article code: 5010620


Technical Drawing

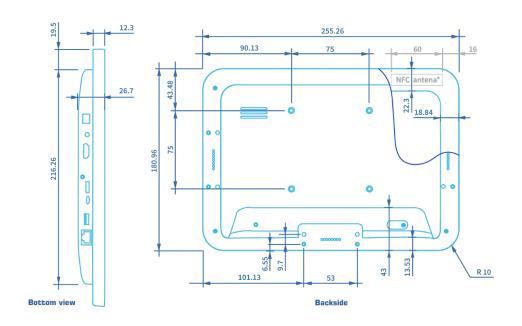

Sustainability


At ProDVX we are committed to doing our part when it comes to the environment. Our products are designed to have the lowest possible impact on the environment, from inception to product retirement. We also strive to operate our offices and warehouse in a carbon-neutral manner. Our aim is to lead the way in conducting responsible business in the digital signage hardware industry.

I/O Overview

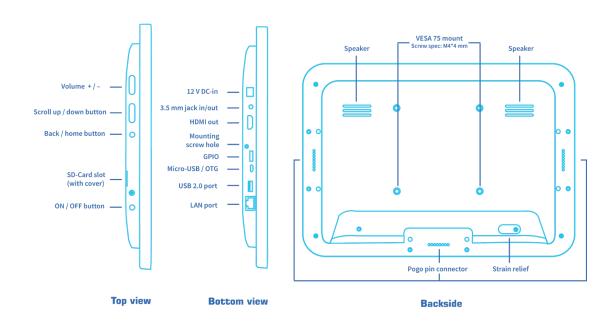

Optional Accessories

GM-75_(8080850) VESA 75 compatible glass mount FM-10_(8080950) Flush mount for in-wall mounting MH-10_(8080960) Stainless steel housing for protection DS-15_(8010150) VESA 75/100 compatible desk stand WM-35_(8050350) VESA 75/100 compatible wall mount



^{*} Compatible with all ProDVX VESA 75 stands, mounts & brackets.

APPC-10XPL (R23-7262)

Article code: 5010620

Product Specifications

Performance

CPU model RockChip RK3568
CPU type Quad-core Cortex-A55
CPU speed A55 - up to 2.0GHz

GPU type Mali-G52
GPU speed up to 950MHz

RAM 4GB
RAM type LPDDR4
Storage 16GB
Storage type eMMC

External storage | SD-Card Slot (door)

Operating System | Android 13

Panel

LCD | 1280x800xRGB@60Hz

 Type
 TFT LCD IPS

 Size
 10.1

 Contrast
 800 to 1

 Viewing Angle
 H160 / V160

Colours 8 bit LVDS (16.7M) 72%NTSC CIE1931

Response time 30 ms

Backlight Edge-LED backlight

BLU 500 cd/m2
Cover glass >6H - 1.55mm
Non-glare
Haze 2~8%

Touch type 10 TP Pcap 10ms

Frame

Size 255,3 x 181 x 26,7 mm

Weight 650 g

Material ABS+PC (Macrolon)

VESA VESA 75 Color Black

Certification:

UKCA.CE.FCC.RoHS.REACH

Special

PoE | IEEE 802.3at (PoE+)

IEEE 802.1x LAN & WIFI, PEAP/TLS/TTLS

Cooling Fanless **HDMI-in** N.A.

HDMI-outYes, HDMI outWiFi802.11 a/b/g/n/ac

Bluetooth

LAN 10/100/1000 Mbps LAN

Audio internal 2 x 2 W

Audio external 3.5mm jack in/out

Microphone YES

1x USB 2.0 type A

OTG 1x USB 2.0 type micro

Other ports N.A.

PoGo slots
NFC
Via PoGo & USB
LED
2 sided LED bar (RGB)

Operating hrs 24h / 7d

MTBF 50,000 hours demonstrated

Clock batt. CR1220 Lithium metal, non rechargeable

Alternative OS Debian 11

Power input12 V / 2 A (EU, UK, US)Operating temp $0 \sim 40 \text{ degrees C}$ Storage temp $-10 \sim 55 \text{ degrees C}$

Humidity 10 ~ 90 % non-condensing

Warranty 3 years

Orientation Landscape, Portrait, Table Mode, Flushmount

SIM card slot N.A.

Power usage 10 ~ 23 Watt
OSD language Multi OSD language

Motion sensor N.A

Multimedia support

Image formatJPG,JPEG,PNG,BMP,GIFAudio formatAAC,ASF,MP2,OGG,WAV,WMAVideo formatMP4,MPG,MPEG2,MPEG4