


# Datasheet for APPC-Series

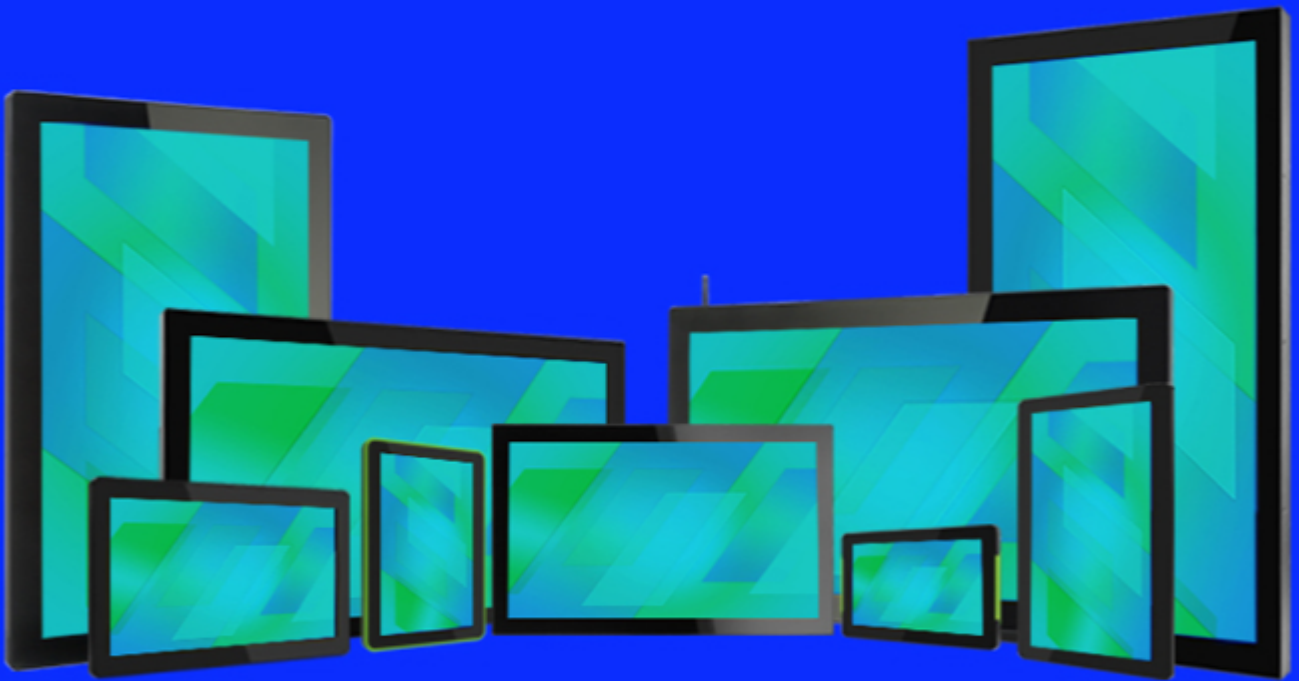

**PRO DVX** | ALWAYS

**ProDVX Europe B.V.**

Europalaan 10  
5232 BC, Den Bosch  
The Netherlands

+31 (0)73 737 0345  
sales@prodvx.com

# Android Panel PCs

## APPC-22XP-R23

### Panel

<b>Size</b>	21.5"
<b>Resolution</b>	1920 x 1080
<b>Brightness</b>	250 cd/m2
<b>Viewing Angle</b>	H 178° / V 178°
<b>Treatment</b>	Anti-glare
<b>Touch Type</b>	10 point touch projected capacitive
<b>Contrast Ratio</b>	3000 : 1
<b>Cover glass</b>	>6H - 2.05mm
<b>Haze</b>	4~10%
<b>Aspect Ratio</b>	16:9 wide

### Physical

<b>Housing</b>	ABS+PC (Macrolon)
<b>Color</b>	Black
<b>Weight</b>	4200 g
<b>Dimensions</b>	530,5 x 321,22 x 35 mm
<b>Mounting / VESA</b>	VESA 100
<b>Power Supply</b>	12 V / 5 A
<b>Power Supply included?</b>	Yes
<b>Power Usage</b>	30 ~ 45 Watt

### System

<b>CPU</b>	RK3399 (Dual Core Cortex A72 with Quad Core A53)
<b>GPU</b>	MALI T860MP4 / 3D Graphic Engine (4K)
<b>System Memory</b>	4GB LPDDR4 SDRAM
<b>Internal Storage</b>	16GB eMMC
<b>OS</b>	Android 11
<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN
<b>Power over Ethernet (PoE)</b>	IEEE 802.3bt Type 3 (PoE++)
<b>WiFi</b>	802.11 a/b/g/n/ac
<b>Bluetooth</b>	BT 5.2
<b>Storage / Working Humidity</b>	10 ~ 90% non-condensing
<b>Storage Temp</b>	-10 ~ 55 degrees C
<b>Working Temp</b>	0 ~ 40 degrees C

### Other

<b>I/O Ports</b>	12 V DC-IN, 3x Pogo pin, 2x COM (RJ45), 2x USB 2.0, Ethernet (RJ45), USB-C, USB 3.0, S/PDIF, mini-hdmi-out, 3.5 mm jack in/out
<b>Microphone</b>	YES
<b>Speakers</b>	2 x 3 W
<b>LED Light Bar</b>	Optional accessory
<b>Integrated NFC</b>	Optional accessory
<b>Camera</b>	Optional accessory
<b>Safety features</b>	Cable lock on power cable, IEEE 802.1X PEAP/TLS/TTLS support on LAN and WiFi
<b>Standard Warranty</b>	3 years

