

# APPC-10SFA

(R25-7581)

Android Panel PC



## Product Overview

The ProDVX APPC-10SFA is a versatile 10.1" Android Panel PC featuring a Full Surround LED bar, integrated NFC reader, front-facing 5MP camera, and motion radar sensor, designed to meet the needs of interactive and dynamic applications. Powered by the RockChip RK3568 Quad-core processor and running Android 13, it ensures smooth performance with 4GB RAM and 16GB storage, expandable via SD card. The Full Surround LED bar provides customizable RGB lighting for branding or status indication, while the NFC reader (NXP PN7160) enables seamless contactless interactions. The front-facing camera supports applications such as user identification or capturing visual data, and the motion radar sensor enhances automation by detecting proximity for energy-saving or interactive triggers. Its direct-bonded IPS touchscreen with 1280x800 resolution ensures sharp visuals and responsive touch. Additional features like PoE+, fanless cooling, mini-HDMI out, and versatile connectivity options (USB, LAN) make it ideal for retail, hospitality, healthcare, and industrial environments. Built for 24/7 operation with an MTBF of 50,000 hours, this compact yet durable device supports flexible mounting options to meet diverse business needs.



**Full Surround LED Bar:** Features a fully customizable RGB surround LED light bar with individually controllable LEDs, perfect for dynamic visual notifications and enhanced user interaction.



**Integrated NFC Technology:** Built-in NFC capabilities enable seamless contactless interactions, secure authentication, and efficient access control.



**5 MP Front Camera:** High-quality 5 MP front-facing camera supports advanced imaging needs, perfect for video conferencing, facial recognition, or interactive applications.



**Radar Motion Sensor:** Integrated radar motion sensor enhances automation and interactivity by detecting movement with precision for a smarter user experience.




**Powerful Performance and Durability:** Powered by a RockChip RK3568 Quad-core Cortex-A55 CPU with Mali-G52 GPU, featuring fanless cooling, rugged ABS+PC housing, >6H hardness cover glass, and VESA 75 mounting for flexible installation in any environment.

# APPC-10SFA (R25-7581)

Article code: 5010740


## Technical Drawing

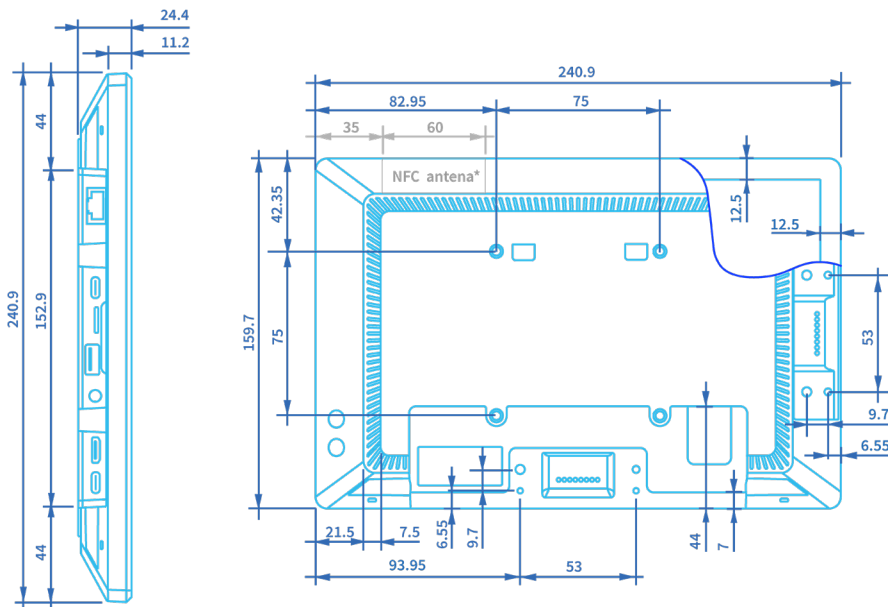

## Sustainability

At ProDVX we are committed to doing our part when it comes to the environment. Our products are designed to have the lowest possible impact on the environment, from inception to product retirement. We also strive to operate our offices and warehouse in a carbon-neutral manner. Our aim is to lead the way in conducting responsible business in the digital signage hardware industry.

## I/O Overview

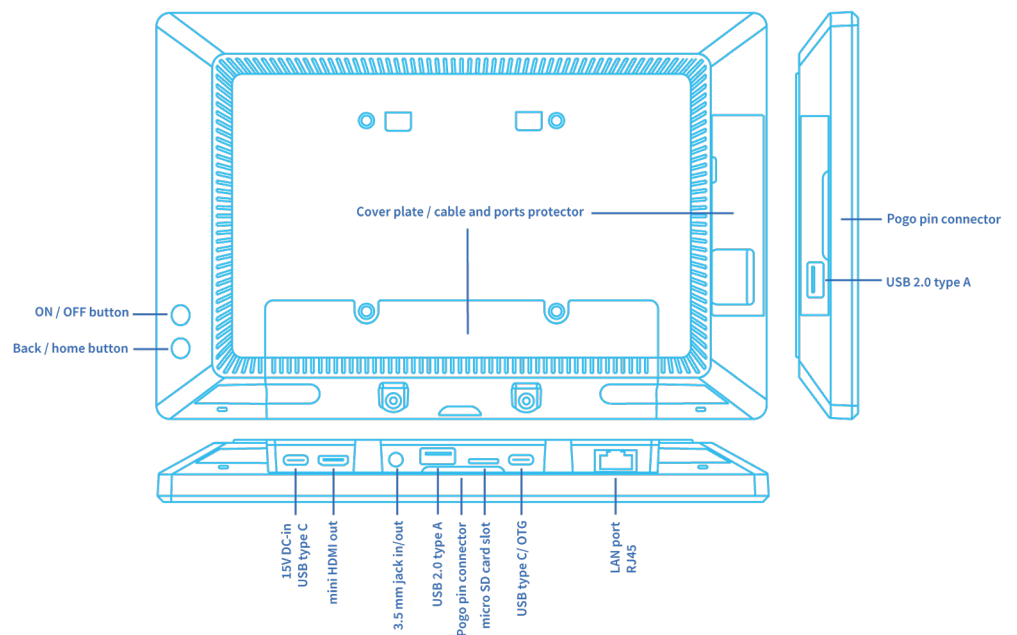

## Optional Accessories

- GM-75\_(8080850) VESA 75 compatible glass mount
- TS-10\_(8085100) VESA 75 compatible table stand
- DS-10\_(8010100) VESA 75/100 compatible desk stand



Barcode scanner  
(9010300)

\* Compatible with all ProDVX VESA 75 stands, mounts & brackets.

# APPC-10SFA (R25-7581)

Article code: 5010740

## Product Specifications

Certification:

UKCA,CE,FCC,RoHS,REACH

### Performance

CPU model	RockChip RK3568
CPU type	Quad-core Cortex-A55
CPU speed	A55 - up to 2.0GHz
GPU type	Mali-G52
GPU speed	up to 950MHz
RAM	4GB
RAM type	LPDDR4
Storage	16GB
Storage type	eMMC
External storage	SD-Card Slot
Operating System	Android 13

### Panel

LCD	1280x800xRGB@60Hz
Type	Direct bonded TFT LCD IPS
Size	10.1
Contrast	1000 to 1
Viewing Angle	H160 / V160
Colours	8 bit LVDS (16.7M) 72%NTSC CIE1931
Response time	25 ms
Backlight	Edge-LED backlight
BLU	450 cd/m2
Cover glass	>6H - 1.55mm
Treatment	Non-glare
Haze	2 ~ 8%
Touch type	10 TP Pcap 10ms

### Frame

Size	240,9 x 159,7 x 24,4 mm
Weight	600 g
Material	ABS+PC (Macrolon)
VESA	VESA 75
Color	Black

### Special

PoE	IEEE 802.3at (PoE+)
IEEE 802.1x	LAN & WiFi, PEAP/TLS/TTLS
Cooling	Fanless
HDMI-in	N.A.
HDMI-out	Yes, mini-HDMI out
WiFi	optional via USB dongle
Bluetooth	optional via USB dongle
LAN	10/100/1000 Mbps LAN
Audio internal	2 x 2 W
Audio external	3.5mm jack in/out
Microphone	Yes
USB ports	1x USB 2.0 type A
OTG	1x USB 3.0 type C
Other ports	1x USB 2.0 type A (door)
PoGo slots	2x (bottom/left)
NFC	Integrated NFC reader (NXP PN7160)
Camera	5 M/P front camera
Barcode scan	via PoGo & USB
LED	Individually controlled Full RGB LED
Operating hrs	24h / 7d
MTBF	50,000 hours demonstrated
Clock batt.	CR1220 Lithium metal, non rechargeable
Alternative OS	N.A.
Power input	12 V / 2 A (EU, UK, US)
Operating temp	0 ~ 40 degrees C
Storage temp	-10~55 degrees C
Humidity	10 ~ 90 % non-condensing
Warranty	3 years
Orientation	Landscape,Portrait,Flushmount
SIM card slot	N.A.
Power usage	10 ~ 23 Watt
OSD language	Multi OSD language
Motion sensor	YES

### Multimedia support

Image format	JPG,JPEG,PNG,BMP,GIF
Audio format	AAC,ASF,MP2,OGG,WAV,WMA
Video format	H.264,MP4,MPG,MPEG2,MPEG4